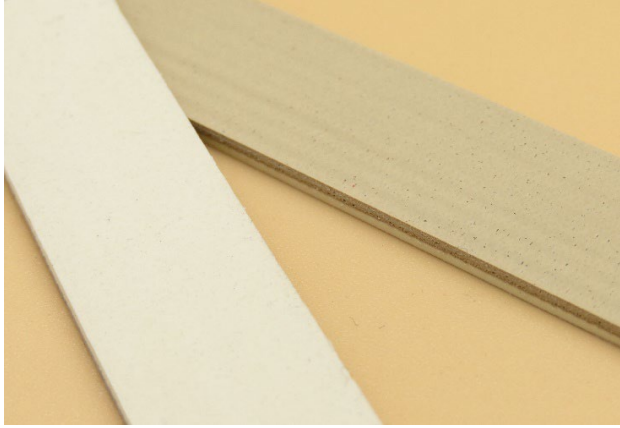


Technical Datasheet	SEB™ Belt type	SE-A-WN	SC-018 ver.2
----------------------------	-------------------	----------------	--------------



Applications

- Folder gluer(Feeder section)
- Feeder belt

Construction



Ground side	Glossy side
Natural rubber	Chloroprene rubber
White	White
Hardness 35 JIS.A	
Tension member	Splice
Polyester	Seamless
Cord	

Dimensions

Width	7~400mm
Length	400~1970mm <small>*Depending on mold size</small>
Standard thickness	8.0mm
Range of thickness	2~12mm
Weight	10.2kg/m ²

Please contact Nitta if you need other dimensions.

Regulatory compliance
RoHS(2011/65/EC),(EU)2015/863)

Features

- High grip
- Cushioning property
- Keeps conveyed goods clean

Properties

Dynamic properties	
Standard elongation	0.5%
Tension after relaxation at 0.5%	3.7N/mm
Operation temperature range	-20~60°C
Minimum pulley diameter	
When of standard thickness	80mm
<small>*Except for standard tickness, minimum pulley diameter is ten times the belt tickness.</small>	
Tensile properties	
Tensile strength	58.8N/mm
Elongation at break	10%
Maximum allowable elongation	0.5~1.0%
Coefficient of friction	
Ground side vs. Paper	Approx.2.0
Glossy side vs. Steel	0.2~0.4